

## SPRING-LOADED PROCESS MOUNTING HARDWARE WITH OPTIONAL TERMINAL HEAD

### How to build a part number:

To order an Applied Sensor Technologies temperature sensor, select the requirements for the categories listed below and fill in the corresponding boxes with your selection.

| SENSOR TYPE | ASSEMBLY STYLE | CONNECTION TYPE AND MATERIAL | CONN. LENGTH | SHEATH DIAMETER | SHEATH MATERIAL | CALIBRATION | HOT JUNCTION | SHEATH LENGTH | LEADWIRE LENGTH | OPTIONS |
|-------------|----------------|------------------------------|--------------|-----------------|-----------------|-------------|--------------|---------------|-----------------|---------|
|             |                |                              |              |                 |                 |             |              |               |                 |         |

#### SENSOR TYPE

**MI** – Mineral insulated thermocouple

#### ASSEMBLY STYLE

**48** – Sheath with spring-loaded hex connector and connection hardware; head as option

#### CONNECTION TYPE AND MATERIAL

| Code         | Union Type        | Union Material      | Lower Nipple Material |
|--------------|-------------------|---------------------|-----------------------|
| <b>NU</b>    | Ordinary location | Carbon steel        | None                  |
| <b>NUS</b>   | Ordinary location | Stainless steel     | None                  |
| <b>NUX</b>   | Explosion-proof   | Electroplated steel | None                  |
| <b>NUN</b>   | Ordinary location | Carbon steel        | Carbon steel          |
| <b>NUNS</b>  | Ordinary location | Stainless steel     | Stainless steel       |
| <b>NUNX</b>  | Explosion-proof   | Electroplated steel | Carbon steel          |
| <b>NUNXS</b> | Explosion-proof   | Electroplated steel | Stainless steel       |

#### CONNECTION LENGTH (For NU, NUX, NUS, use 002.5)

### (e.g., 006 = 6 inch)

(See chart for available standard lengths)

#### SHEATH DIAMETER (in inches)

**4** – 1/8" (0.125)

**6** – 3/16" (0.188)

**7** – 1/4" (0.250)

**9** – 3/8" (0.375)

#### SHEATH MATERIAL

**3** – 316 stainless steel

**5** – Inconel® 600

#### CALIBRATION – Standard limits

**J** – Single J      **JJ** – Dual J

**K** – Single K      **KK** – Dual K

**T** – Single T      **TT** – Dual T

**E** – Single E      **EE** – Dual E

*Special limits are available – consult AST*

#### HOT JUNCTION

**G** – Grounded junction

**U** – Ungrounded junction

#### SHEATH LENGTH (Note: lengths over L84 will be shipped coiled unless otherwise specified at time of order)


**L#** – (e.g., L6 = 6 inch sheath, L12.5 = 12.5 inch length)

#### LEADWIRE LENGTH

**X#** – (e.g., X3 = 3 inch length; X3 is standard if specifying optional head)

**OPTIONS** – see back page

| STANDARD AVAILABLE CONNECTION LENGTHS FOR NUN CONNECTIONS |
|-----------------------------------------------------------|
| 3.00                                                      |
| 3.50                                                      |
| 4.00                                                      |
| 4.50                                                      |
| 5.00                                                      |
| 6.00                                                      |
| 7.00                                                      |
| 8.00                                                      |
| 9.00                                                      |
| DIMENSIONS ARE GIVEN IN INCHES                            |

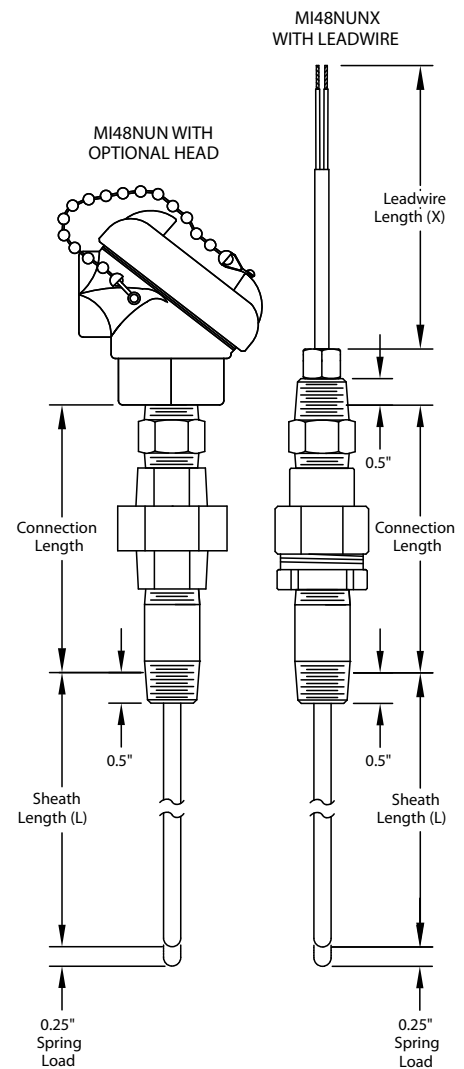

## AVAILABLE OPTIONS and MODIFICATIONS

| ASSEMBLY OPTIONS                                            |                                                                                                                                                                               |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Option Code                                                 | Description                                                                                                                                                                   |
| TAG1                                                        | Stainless steel tag and wire                                                                                                                                                  |
| CAL1                                                        | NIST traceable calibration [specify point(s)]                                                                                                                                 |
| CRT1                                                        | Certificate of conformance                                                                                                                                                    |
| RB10                                                        | Replace terminal block with customer supplied part                                                                                                                            |
| RB11                                                        | Supply assembly with no terminal block inside head                                                                                                                            |
| WC20                                                        | Wiring cable gland for 0.187 - 0.312 diameter cables, for terminal heads with 1/2" NPT conduit connections                                                                    |
| WC21                                                        | Wiring cable gland for 0.125 - 0.187 diameter cables, for terminal heads with 1/2" NPT conduit connections                                                                    |
| WIRING CONNECTION OPTIONS                                   |                                                                                                                                                                               |
| Option Code                                                 | Description                                                                                                                                                                   |
| WC76                                                        | #6 spade terminals, plated copper                                                                                                                                             |
| WC70                                                        | #10 spade terminals, plated copper                                                                                                                                            |
| WC84                                                        | 1/4" push-on insulated terminals, plated copper                                                                                                                               |
| WC90                                                        | #10 ring terminals                                                                                                                                                            |
| WC98                                                        | #8 ring terminals                                                                                                                                                             |
| TRANSMITTERS - for complete specs, see Transmitters section |                                                                                                                                                                               |
| TR11                                                        | 4-20 mA, 2-wire; single input; isolated output; specify range, units of measure (e.g., 0-200°C) and terminal head with *. See Accessories section for additional information. |
| TR12                                                        | 4-20 mA, 2-wire transmitter, single input, non-isolated output; specify range and units of measure (e.g., 0-200°C) and terminal head with *.                                  |
| TR13                                                        | HART®/ 4-20 mA, 2-wire transmitter, single input, isolated output; specify range and units of measure (e.g., 0-200°C) and terminal head with *.                               |

### THERMOWELLS & PROTECTION TUBES

For a complete offering of metal, ceramic and composite material thermowells and protection tubes, please see the Thermowell and Protection Tube sections.

| NEMA 4 OR 4X TERMINAL HEAD OPTIONS                                                                                                                                                               |                                 |                    |                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|--------------------|--------------------|
| Head without ground screw                                                                                                                                                                        | Head with internal ground screw | Process Connection | Conduit Connection |
| Cast aluminum, screw cover with chain, NEMA 4                                                                                                                                                    |                                 |                    |                    |
| HD10*                                                                                                                                                                                            | HD11 *                          | 1/2"               | 1/2"               |
| HD12*                                                                                                                                                                                            | HD13*                           | 1/2"               | 3/4"               |
| Epoxy-coated aluminum, screw cover with chain, NEMA 4X                                                                                                                                           |                                 |                    |                    |
| HD50*                                                                                                                                                                                            | HD51 *                          | 1/2"               | 1/2"               |
| HD52*                                                                                                                                                                                            | HD53 *                          | 1/2"               | 3/4"               |
| Cast iron, screw cover with chain, NEMA 4                                                                                                                                                        |                                 |                    |                    |
| HD20*                                                                                                                                                                                            | HD21 *                          | 1/2"               | 1/2"               |
| HD22*                                                                                                                                                                                            | HD23 *                          | 1/2"               | 3/4"               |
| 316 stainless steel, screw cover with chain, NEMA 4X                                                                                                                                             |                                 |                    |                    |
| HD40*                                                                                                                                                                                            | HD41 *                          | 1/2"               | 3/4"               |
| White polypropylene, screw cover with chain, NEMA 4                                                                                                                                              |                                 |                    |                    |
| HD30                                                                                                                                                                                             | N/A                             | 1/2"               | 3/4"               |
| Black polypropylene, screw cover with chain, NEMA 4                                                                                                                                              |                                 |                    |                    |
| HD31                                                                                                                                                                                             | N/A                             | 1/2"               | 3/4"               |
| Nylon, screw cover                                                                                                                                                                               |                                 |                    |                    |
| HD32                                                                                                                                                                                             | N/A                             | 1/2"               | 1/2"               |
| EXPLOSION-PROOF TERMINAL HEAD OPTIONS **                                                                                                                                                         |                                 |                    |                    |
| Option Code                                                                                                                                                                                      | Process Connection              |                    | Conduit Connection |
| Cast aluminum, screw cover with chain; o-ring gasket rated to 100°C; ceramic terminal block; FM/CSA approved for Class I Div. 1, Groups B, C, D; Class II, Groups E, F, G; internal ground screw |                                 |                    |                    |
| HD70*                                                                                                                                                                                            | 1/2"                            |                    | 1/2"               |
| HD71 *                                                                                                                                                                                           | 1/2"                            |                    | 3/4"               |
| Stainless steel (same specs as HD70/71)                                                                                                                                                          |                                 |                    |                    |
| HD74*                                                                                                                                                                                            | 1/2"                            |                    | 1/2"               |
| HD75*                                                                                                                                                                                            | 1/2"                            |                    | 3/4"               |
| Epoxy-coated (same specs as HD70/71)                                                                                                                                                             |                                 |                    |                    |
| HD80*                                                                                                                                                                                            | 1/2"                            |                    | 1/2"               |
| HD81 *                                                                                                                                                                                           | 1/2"                            |                    | 3/4"               |
| Cast aluminum; ATEX approved for EEx d IIC; screw cover with chain; silicone rubber o-ring gasket; ceramic terminal block; rated for NEMA 4X, IP66 to IP68; internal and external ground screws  |                                 |                    |                    |
| HD72*                                                                                                                                                                                            | 1/2"                            |                    | 1/2"               |
| HD73*                                                                                                                                                                                            | 1/2"                            |                    | 3/4"               |
| Cast aluminum (Formerly Style 60); screw cover; plastic terminal block; UL/CSA approved for Class I Div. 1, Groups C and D; Class II Groups E, F and G.                                          |                                 |                    |                    |
| HD60                                                                                                                                                                                             | 1/2"                            |                    | 1/2"               |
| HD61                                                                                                                                                                                             | 1/2"                            |                    | 3/4"               |
| *can be used with transmitters                                                                                                                                                                   |                                 |                    |                    |

\*\*Note - assemblies using XP heads are not 3rd-party certified. Approval applies to head only.

Note: Many non-standard options, including additional sheath diameters and materials, may also be available - consult AST for specific requirements. HART® is a registered trademark of the HART Communication Foundation.